




FBA Series



FEATURES







- E}• OE μ Ÿ}v •}oμŸ}v (}OE P v OE o •]Pv o
- s OE}}μ• (OE <μ v Ç Z OE š OE]•Ÿ • Á]šZ î u
-]+ OE vš (šμOE • (}OE }μvš OEu •μOE • P
- šZ]vP (OE}u P v OE o •]Pv o• š} Z]PZr•%
- rYîîî <μ o].
- K% OE ŸvP š u% OE šμOE Wrññ£š} =íñî£

APPLICATION

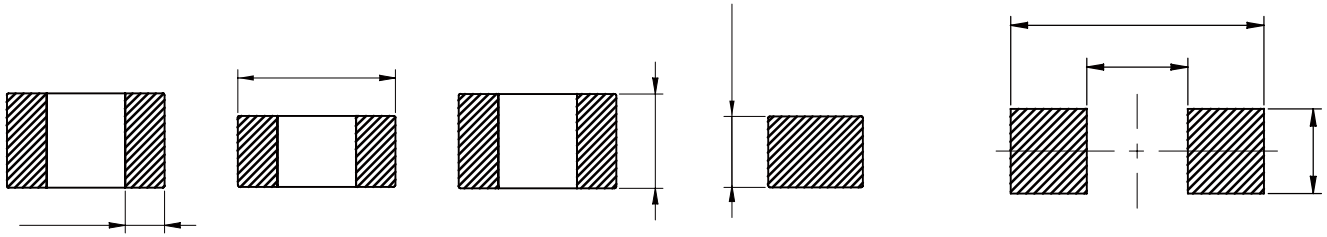


	Impedance @ 100MHz ()	DC Resistance Max. ()	Temperature Rise Current Max. (mA)
& îðîñrîîrðîíZ	íí		
& îðîñrîóîrðîíZ	íó		
& îðîñrîðîrðîíZ	îð		
& îðîñrîîîrðîíZ	îî		
& îðîñrðîîrðîíZ	ðî		
& îðîñròîîrðîíZ	òî		
& îðîñrîíîrðîíZ	íîî		
& îðîñrîñîrðîíZ	íñî		
& îðîñrîîîrðîíZ	îîî		
& îðîñrðóîrðîíZ	ðóî		
& îðîñròîîrñîíZ	òîî		
& îðîñrîîîrðîíZ	íîîî		
& îðîñrîîîrñîíZ	íîîî		
& îðîñrîñîrîñîíZ	íñîî		
& îðîñrîîîrîñîíZ	îîîî		
& îðîñrîîîrðîíZ	îîîî		



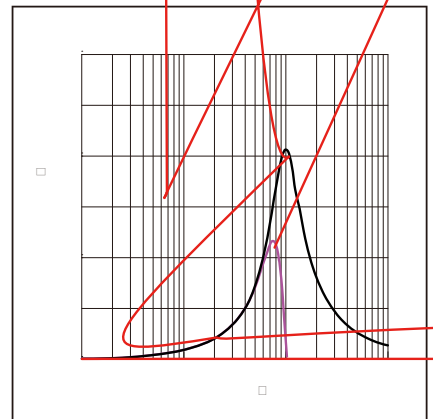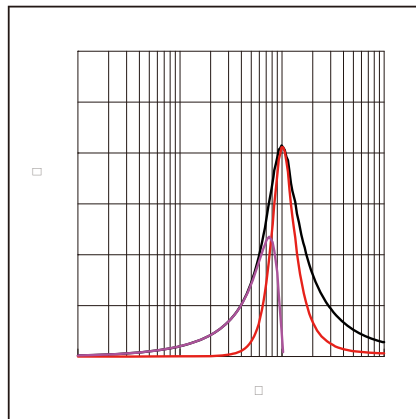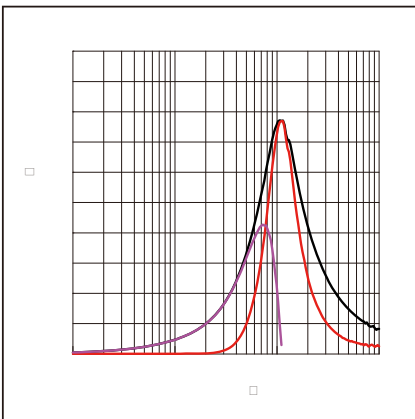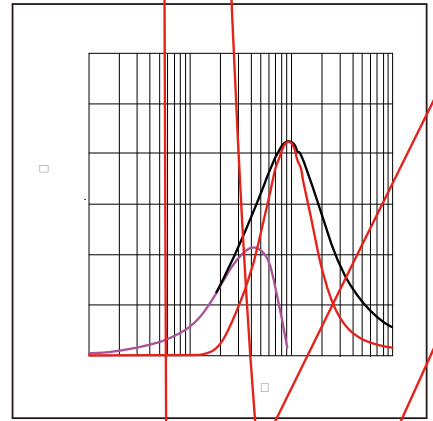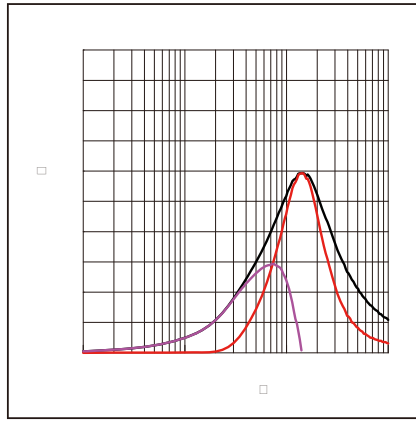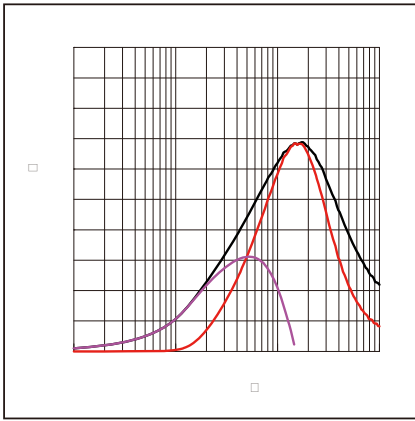





:

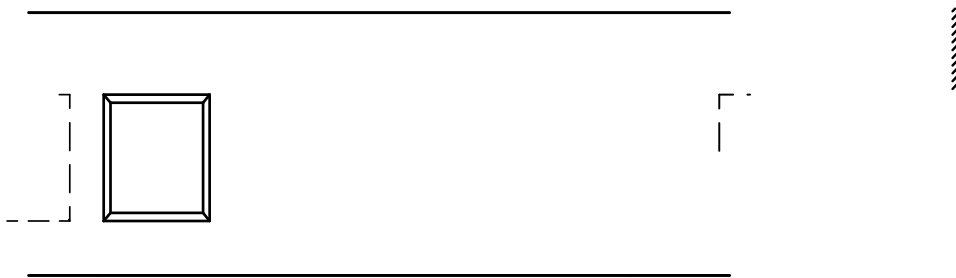

	□	□	□	□	□	□	□	□	□
0805	1.30±0.05	2.10±0.05	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	0.95±0.05	1.75±0.1	0.95±0.05

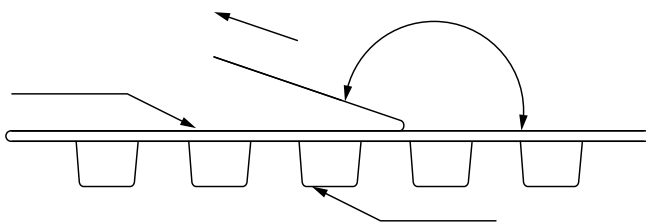

The peel force of top cover tape shall be between 0.14 to 0.58 N

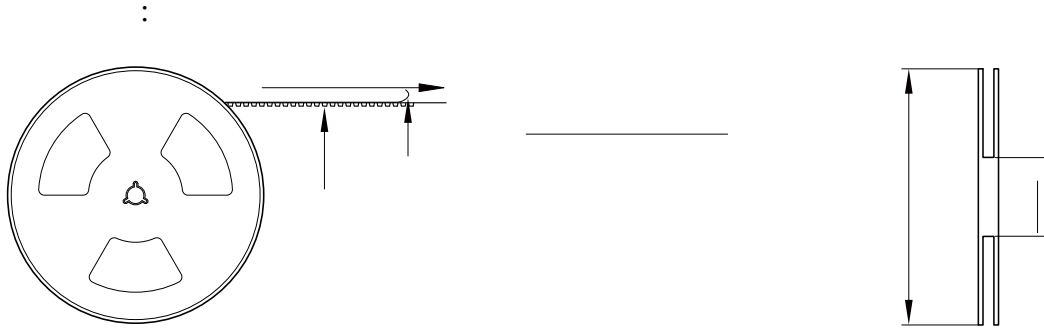

:

•



•

•

•

•



•

•

•