



- Monolithic inorganic material construction.
 - Closed magnetic circuit avoids crosstalk.
 - Suitable for reflow soldering.
 - Available in various sizes.
 - Quantity: 4000pcs
-
- Data lines and low power lines
 - Connection between digital and analog circuit



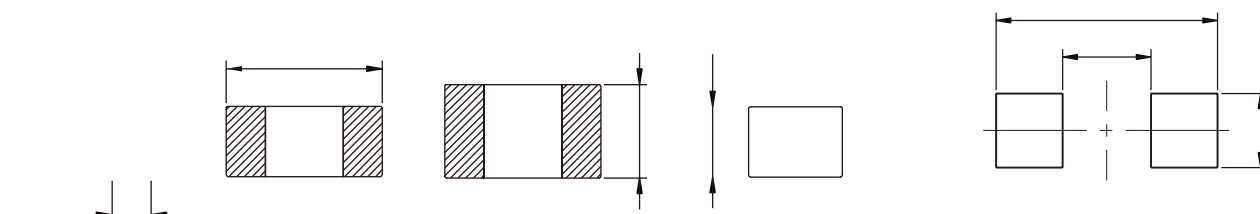

Part No	Thickness T size (mm)	Impedance @100MHz (Ω)	Tolerance	DCR (max) (Ω)	Temperature Rise Current (max) (mA)
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		

Operating Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

