




Typical Electrical Characteristics:



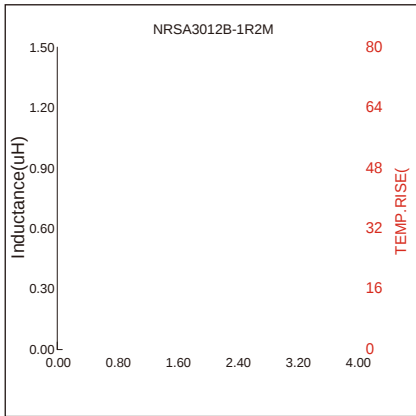


Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.

Max temperature: 260 °C.


Allowed Reflow time: 2x max.

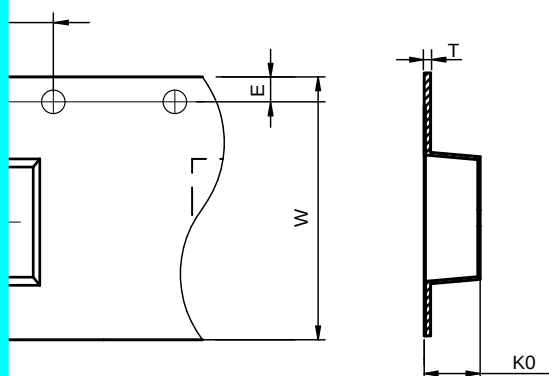

0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
-----------	------------	-----------	------------	-----------	-----------



Reel Dimension: [mm]

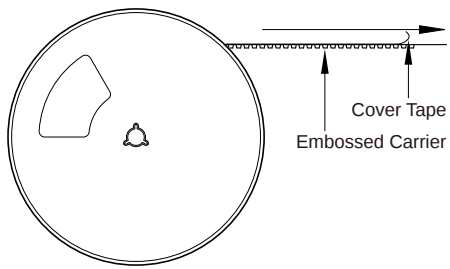

Packaging Quantity: