


NRSM Series


Wire Wound SMD Power Inductor

Size 3012

Dimensions: [mm]

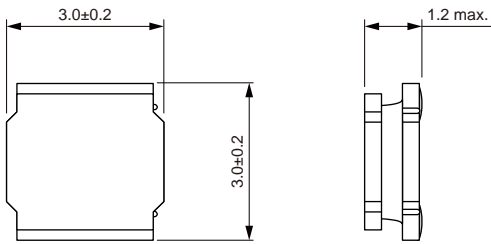

Land Pattern: [mm]

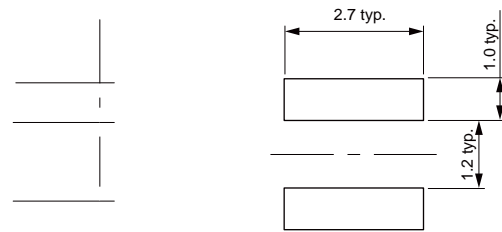


Electrical Properties:

Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (Ω)	DC Resistance Max. (Ω)
±20%	4.80	4.20	10.0	9.30	0.020	0.026
±20%	4.80	4.10	8.90	7.20	0.024	0.032
±20%	4.20	3.80	8.00	6.80	0.031	0.040
±20%	3.60	3.10	6.80	5.80	0.038	0.046
±20%	3.10	2.70	5.40	4.20	0.046	0.054
±20%	2.90	2.50	4.10	3.40	0.062	0.074
±20%	2.35	2.05	3.35	2.80	0.090	0.108
±20%	1.80	1.50	2.60	2.20	0.144	0.185
±20%	1.35	1.15	2.50	2.00	0.215	0.255
±20%	1.25	1.07	1.64	1.20	0.220	0.270
±20%	1.15	0.98	1.45	1.20	0.395	0.474
±20%	0.60	0.50	1.30	1.10	0.610	0.740
±20%	0.46	0.38	1.15	0.96	0.960	1.200

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

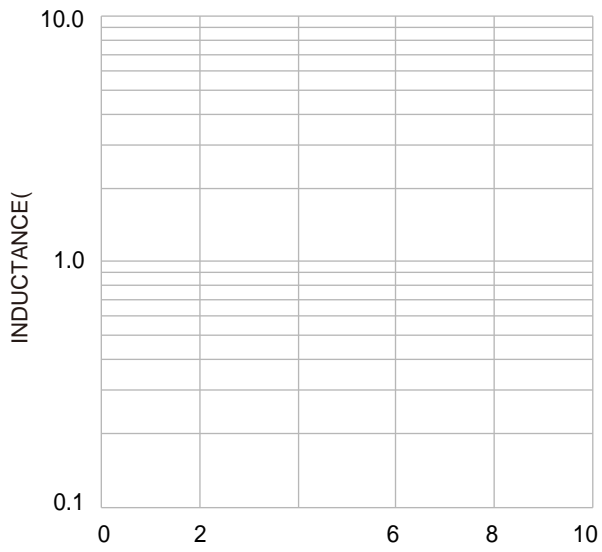

Temperture Rise VS. Current Characteristics:

